
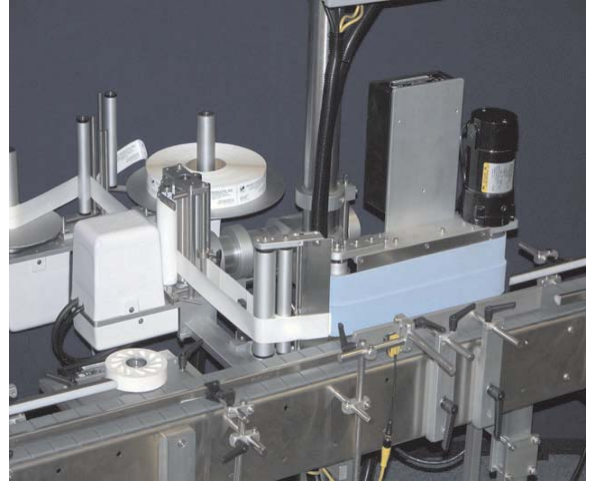


MODEL D 6" WRAP SYSTEM

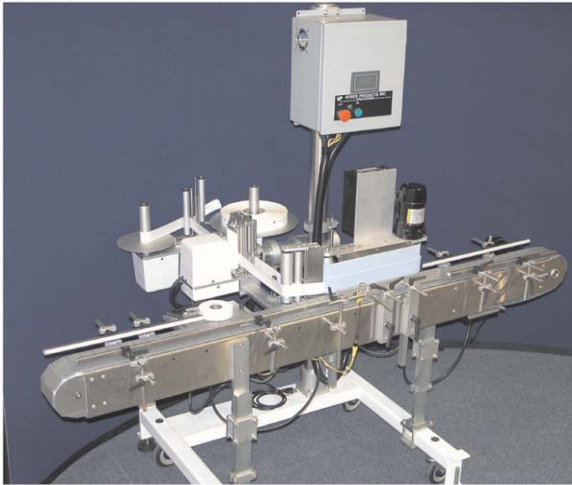

LABELER SPECIFICATIONS:

Label Width: 3" or 6" Standard
Right or Left Hand Configuration
Floor Stand with castors and levelers
Powered unwind and rewind
Unwind 10" or 12" Diameter Roll
Photo Electric Label and Product Sensing
Electronic Proximity Sensor for Clear Labels
Stepper Drive for Label Dispense
Label Web Speeds to 1200"
PLC control with touch screen
Electrical Requirement: 110 VAC

LABELER OPTIONS:

Low Label Detection
Broken Web Detection
Missing Label Feed Through
Hot Stamp Printer
Servo Drive for high speed
(web speeds up to 3000"/min)

PRODUCT HANDLING:

Conveyor stainless steel 4"x 6'
variable dc drive.

Wrap Belt Applicator 4" x 13" centers
(11" label length capacity)
Variable speed dc drive.

Meter Wheel
variable speed dc drive

No custom electrical components!
All electrical components are "off the shelf".

***DESIGNED AND BUILT IN THE U.S.A.
ECONOMICAL TO BUY, OPERATE & MAINTAIN***

For additional options and specifications
consult factory.
Specifications and options subject to change
without notice. Drawing dimensions are not
to scale and are approximate.

Building Labeling Equipment Since 1977

1/06



ROSER PRODUCTS, INC.
14520 Central Ave.
Chino, CA 91710

www.rosersproducts.com
email: sales@rosersproducts.com
(909) 606-8500