


MODEL D PRESSURE SENSITIVE LABELER

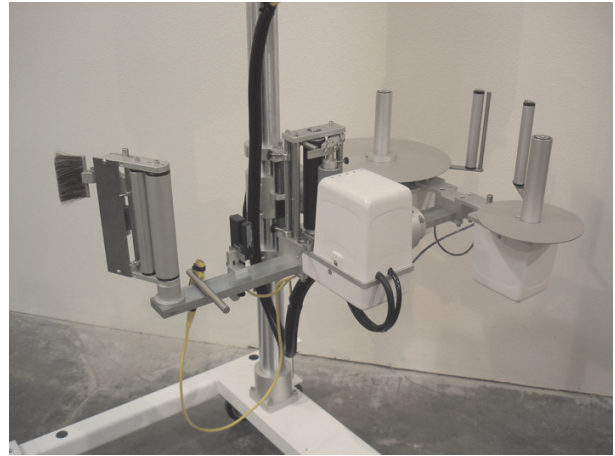

LABELER SPECIFICATIONS:

Label Width: 3" or 6" Standard
Right or Left Hand Configuration
Floor Stand with castors and levelers
Powered unwind and rewind
Unwind 10" or 12" Diameter Roll
Photo Electric Label and Product Sensing
Electronic Proximity Sensor for Clear Labels
Stepper Drive for Label Dispense
Label Web Speeds to 1200"
PLC control with touch screen
Electrical Requirement: 110 VAC

No custom electrical components!
All electrical components are "off the shelf".

LABELER OPTIONS:

Low Label Detection
Broken Web Detection
Missing Label Feed Through
Hot Stamp Printer
Servo Drive for high speed
(web speeds up to 3000"/min)

***Flexibility
Versatility
Low Maintenance***

**DESIGNED AND BUILT IN THE U.S.A.
ECONOMICAL TO BUY, OPERATE & MAINTAIN**

Building Labeling Equipment Since 1977

For additional options and specifications
consult factory.
Specifications and options subject to change
without notice. Drawing dimensions are not
to scale and are approximate.

7/06



ROSER PRODUCTS, INC.
14520 Central Ave.
Chino, CA 91710

www.roserproducts.com
email: sales@roserproducts.com
(909) 606-8500